

# LEXABOX



LIGHT 轻巧型霓虹灯变压器 VERSION

Economic version of transformer in thermoplastic box, suitable for indoor and outdoor applications unprovided of bipolar knife switch

30mA – 200mA 


LEXTERIOR with protection  
This model built in with earth leakage switch. 内置防漏电装置

LEXABOX 属于经济型的变压器，适用于空气媒介不活跃的环境中，以同样的变压器放入一个坚固、自动熄灭的塑料外壳中，达IP33保护水平，薄身，外壳为浅色，可供室外及室内使用。  
Lexadistop跟Lexabox一样，但内建防止泄漏保护装置 (Distop)

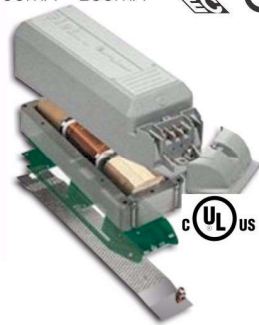

NeonLINE

CASE CODE 外壳编号	W 阔mm	H 高mm	LEXABOX / LEXTERIOR				METALBOX				Average Power loss (watt) 平均功率损耗	
			A 实体长mm	L 底座长mm	Weight 重量kg	W 阔mm	H 高mm	A 实体长mm	L 底座长mm	Weight 重量kg		
1B	6 (5xTwin)	77	81	235	255	3.5	84	81	235	255	3.5	15
1M	6 (5xTwin)	77	89	235	255	4.3	84	89	235	255	4.3	17
1A	6	77	102	235	255	5.3	84	102	235	255	5.3	20
1.5B	3	90	102	255	275	6.6	95	102	255	275	6.6	20
1.5M	3	90	105	255	275	7.3	95	105	255	275	7.3	22
1.5A	3						95	110	255	275	7.7	24
2B	3						113	102	276	295	7.5	23
2M	3						113	113	276	295	9.4	26
2A	3						113	133	276	295	13.2	30
2S	3						113	150	276	295	15.3	35
2SM	1						140	160	330	370	21	40



## Protective Devices 保护装置


### DISTOP 防止泄漏

它能检测高压电路接地的泄漏，并且符合在标准 EN50107 规定的运行次数内切断变压器的电源，因此避免了人员伤亡和对霓虹灯的损害。

该保护装置有个小型的灌有树脂的外壳，抵制空气媒质，和变压器内接线端子板扣完全吻合。

### INTERSTOP 防止泄漏和高压电路切断

INTERSTOP 是一片加插在 Distop 内的组件，用以防止高压开路及低压超载。  
INTERSTOP 内置微处理器及 LED 警告灯。

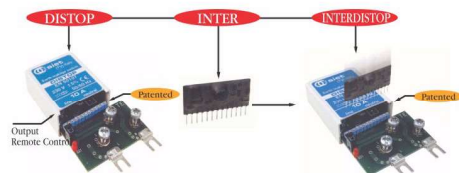

# minilexa

Neon Transformers

NeonLINE

The power of Technology 

just 1.8 kg

仅重 1.8 公斤



COIL & CORE TRANSFORMER, OFFERS NOT ONLY THE SAME RELIABILITY AND DURABILITY BUT

We challenged the technical limits in the development of a very small size coil and core transformer in the weight of 1.8kg only for cold cathode and neon signs. Ideal for narrow space, small channel letters, cove lighting and false ceilings, with the proven of its reliability and durability, least interference with metal objects because of its low frequency current, enabling your lamps to run 24/7 (within specification).



冲破技术极限，BROLLO SIET (思盈) 创造了一个非常细小的铁芯线圈电感变压器，其重量只有 1.8 公斤，尤其适用于狭窄的空间、体积小的槽型字、暗槽灯和假天花。全因其经验证之可靠性和耐久性 - 其低频率电流与金属体所产生的最低程度干扰，允许你的灯管能不间断地工作(符合



TYPE	CURRENT A 230V 50Hz	POWER W	IP	DIMENSIONS (mm)	WEIGHT Kg
3000V 25mA	0.39	44	43	220x69x52	1.8
5000V 25mA	0.58	65	43	220x69x52	1.8
2000V 30mA	0.4	44	43	220x69x52	1.8
4000V 30mA	0.6	70	43	220x69x52	1.8
990V 60mA	0.4	40	43	220x69x52	1.8
2000V 60mA	0.6	70	43	220x69x52	1.8
990V 120mA	0.6	70	43	220x69x52	1.8

brollo siet transformers led technologies